

ULTIMA® X5000/ General Monitors S5000 Accessories



MSA Safety supplies a full line of accessories for use with the Ultima X5000 and General Monitors S5000 gas detectors. Simply select those that meet your need to create your own individualized monitoring solution.



CalGard Remote Calibration Adapter (RCA)

Allows user to easily calibrate remote mounted sensors from a safe and convenient location.

Part No. 10179871	CalGard RCA
--------------------------	-------------



JB5000 Junction box

Stainless steel enclosure that allows the remote connection of X/S 5000 digital sensors as well as the Ultima XIR Plus to the X5000.

Part No. 10213879	3/4" NPT, CSA/ATEX/IEC
Part No. 10213892	3/4" NPT, FM
Part No. 10213893	M25, CSA/ATEX/IEC
Part No. 10213896	M25, FM



SM5000 Sampling Module

Unit features an explosion-proof design and reliably extracts a sample from any confined or inaccessible area and delivers gas concentration reading directly to the installed gas monitor.

Part No. 10043264	Sampling Module (w/Bracket)
Part No. 10058101	Aspirated Pump Module (w/Bracket)



HART Port

Intrinsically safe connection for a HART communicator.

Part No. 10192158	3/4" NPT
Part No. 10192159	M25



PS5000 Power Supply

External power supply enables remote powering of sensors.

Part No. 10053967	DC Power Supply, 24V
--------------------------	----------------------

WE KNOW WHAT'S AT STAKE.



Sunshield

A sunshield is recommended to protect units from direct sun light.


Part No. 10180254	Sunshield
--------------------------	-----------



FieldServer FGD ProtoAir Gateway

Pre-programmed gateway for instant IoT remote monitoring and cloud-based notifications.

Download the [FGD ProtoAir Data Sheet](#) for available part numbers.

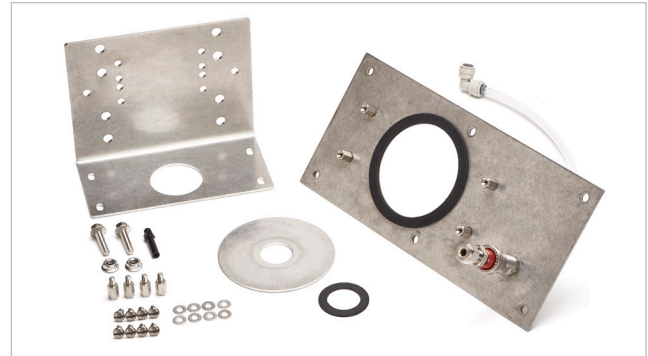

Duct Mount Kit

Allows users to monitor air within ductwork. Three options available:

Part No. 10176947	Rectangular
Part No. 10179124	Round, small (12"-20"/305-508 mm dia.)
Part No. 10179321	Round, large (20"-40"/508-1016 mm dia.)



X/S Connect App

Allows users to interface with the X/S 5000 menus from a mobile device via Bluetooth communication option within a maximum transmission distance of 70 feet (21 m). Available for free from the Apple App store or Google Play.



Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice. MSA is a registered trademark of MSA Technology, LLC in the US, Europe, and other Countries. For all other trademarks visit <https://us.msasafety.com/Trademarks>.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](https://us.msasafety.com/offices).